



General Arrangement

Triple Track Lift and Slide Door (Internal and external handles)

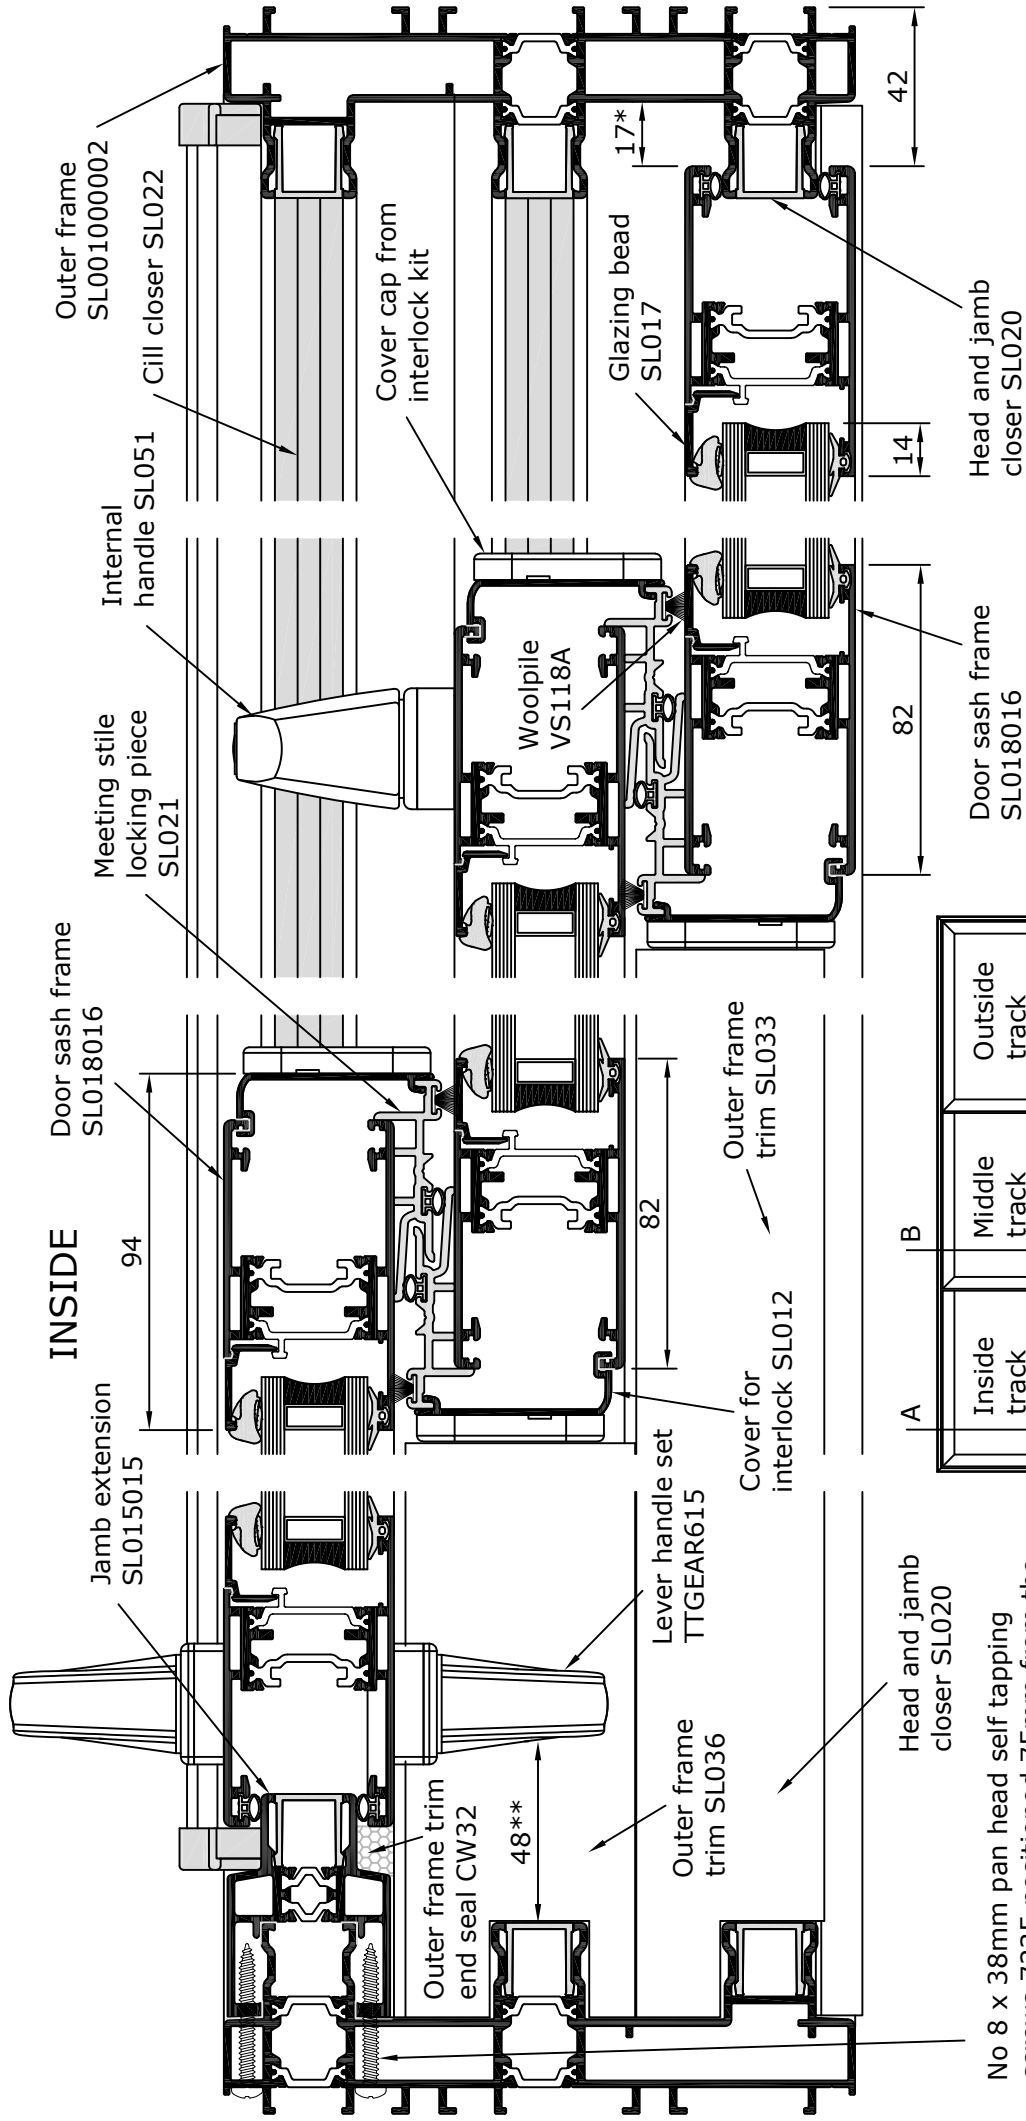

No 8 x 38mm pan head self tapping screws 7235 positioned 75mm from the corners at maximum 300mm centres.

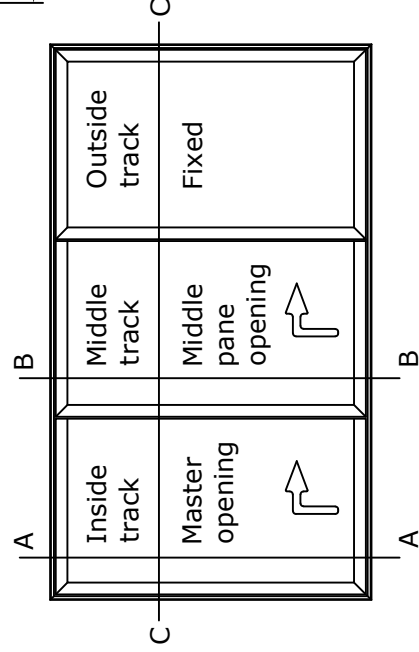

* Tolerance to be in accordance with gearing manufacturers recommendations.
** Jamb extension SL015015 is required to avoid fingertrap between external handle and outer frame.

Scale 1:2