


Euro Groove Casement



System 4-45 Hi+


CASEMENT WINDOW

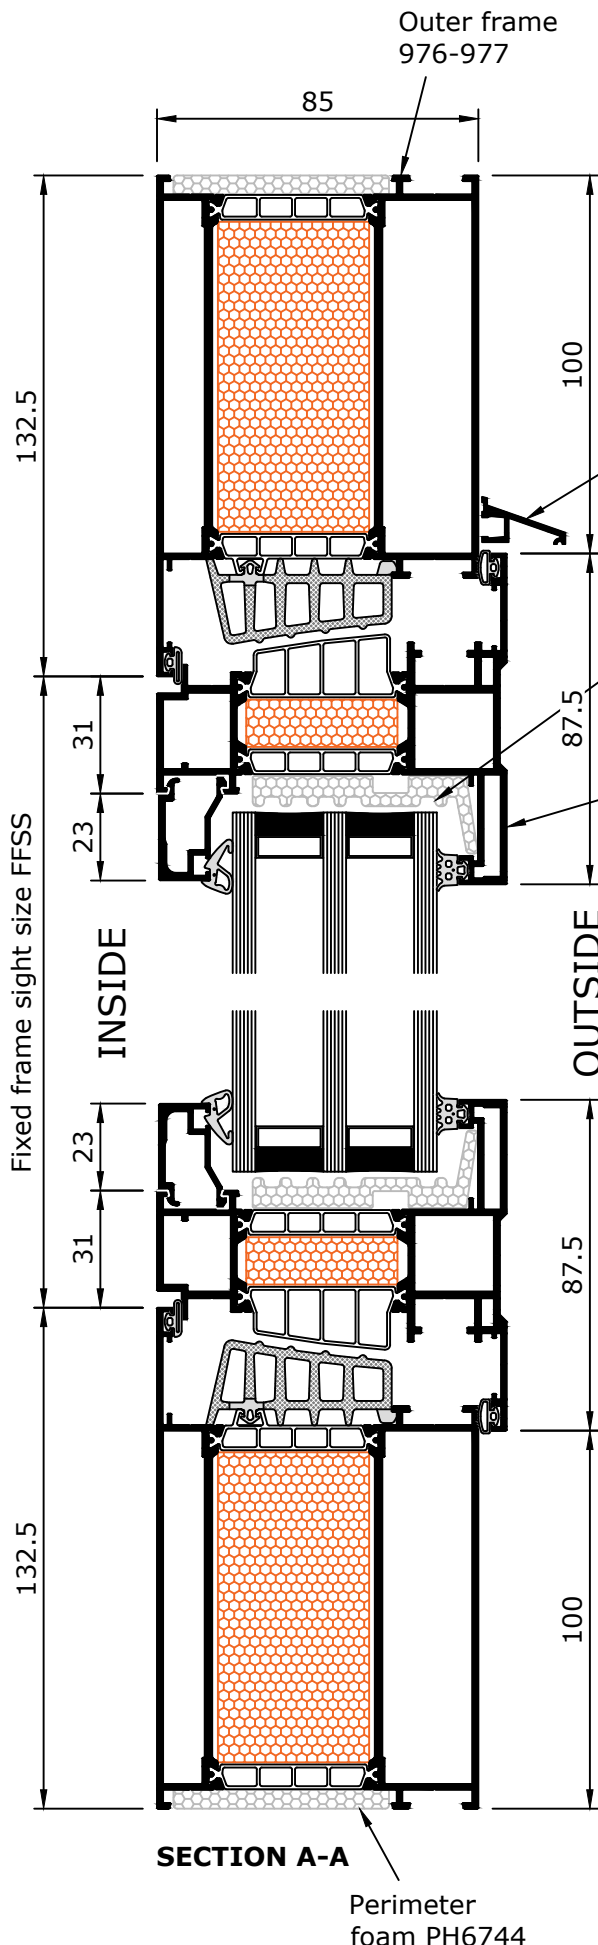

Drip rail
TW05


Glazing unit
perimeter foam
PH6743

Recessed euro
groove sash
926-927

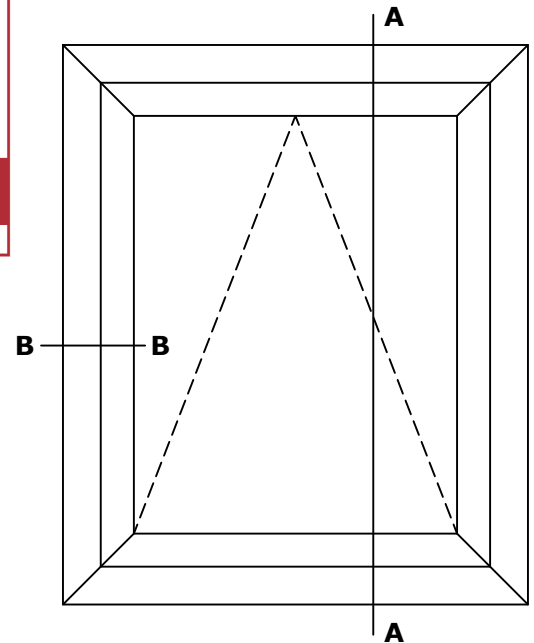

Certified Passive House Component

Metal Technology's 4-45Hi+ System has been assessed by the Passive House Institute for cool, temperate climate zones, and met all component criteria necessary to achieve certification. The window U-values were calculated in accordance with the Passive House Institute's required external frame dimensions of 1.23m x 1.48m with a 0.70W/m²K insulated glass unit, as defined in their certification scope. When higher thermally performing insulated glass units are used the window U-values should also improve.

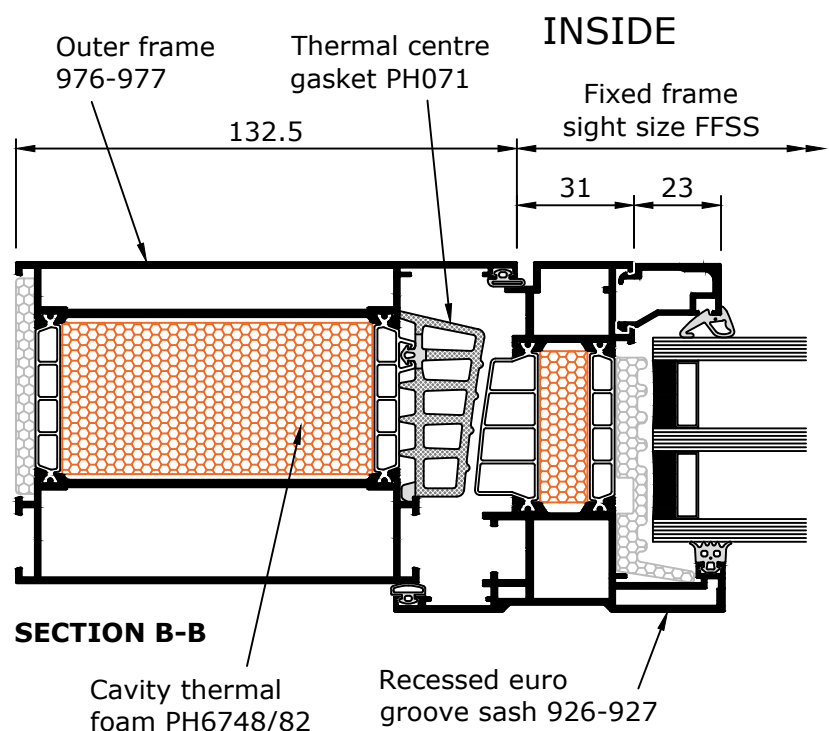

Scale 1:2

© METAL TECHNOLOGY LIMITED. This data sheet is issued subject to the condition that it shall not be reproduced without the consent of Metal Technology in writing. 11/12

OUTSIDE

SHEET 4-45Hi / 2 / 220

rev 0

07/04/26